

LIGHT WORKS


Product Portfolio



2024 Summer Collection

RESIDENTIAL LIGHTING PORTFOLIO



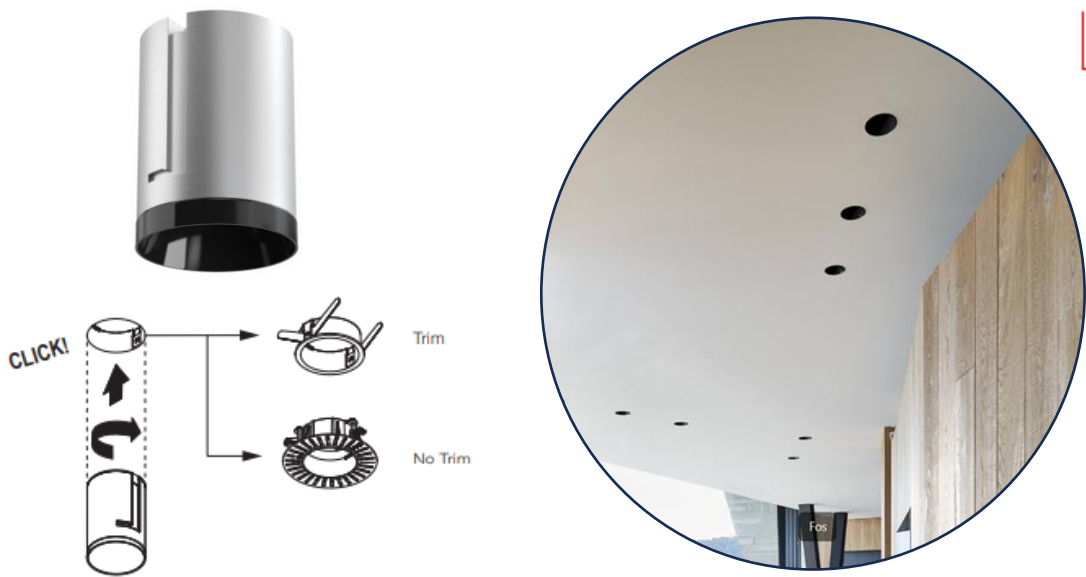

Recessed Lights

Product Features

Wattage	10W/15W/20W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	Black / White
IP Rating	IP 20
Beam Angle	38°/24°*/60°*
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Elegant Functional Lighting

Dimensions

Wattages	10W	15W	20W
Outer (in MM)	ø50	ø60	ø80
Cut out (in MM)	ø59	ø70	ø80
Height (in MM)	75	90	105

FOS-MICRO-RECESSED LIGHTS




FOS -MICRO HOLE



FOS –MICRO EYE



FOS –MICRO DEEP

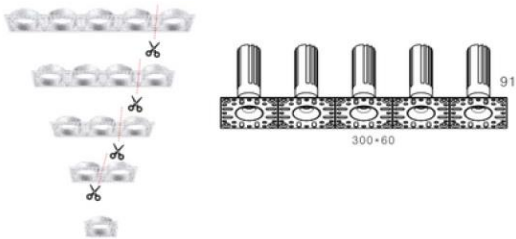

Fos-Micro-Recessed Lights


Product Features

Wattage	10W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	Black / White
IP Rating	IP 20
Beam Angle	38°/24°*/60°*
Lamp	Bridgelux / Cree
Driver	  
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	MICRO HOLE – 10W	MICRO EYE -10W	MICRO DEEP – 10W
Outer (in MM)	Ø42	Ø42	Ø42
Cut out (in MM)	Ø38	Ø38	Ø38
Height (in MM)	100	91	91





FOS -MINI HOLE



FOS –MINI DEEP



Fos-Mini-Recessed Lights

Product Features

Wattage	15W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	Black / White
IP Rating	IP 20
Beam Angle	38°/24°*/60°*
Lamp	Bridgelux / Cree
Driver	
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	


Dimensions

Wattages	MINI HOLE – 15W	MINI DEEP – 15W
Outer (in MM)	Ø57.5	Ø57.5
Cut out (in MM)	Ø54	Ø54
Height (in MM)	79	79



Automation Options Available



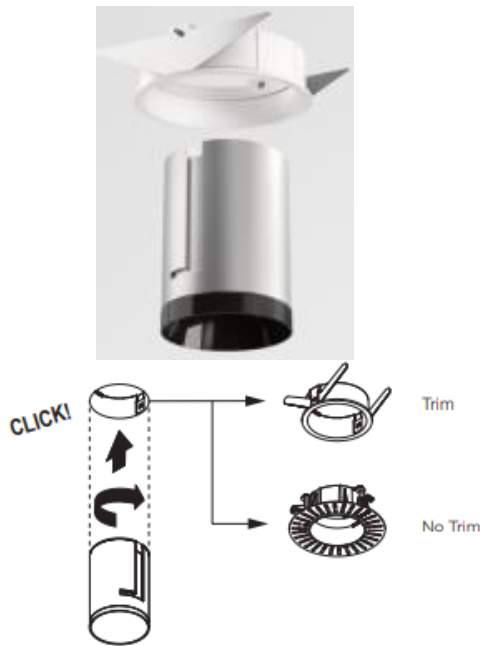

Fos-Trim-Recessed Lights

Product Features

Wattage	10W/15W/20W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	Black / White
IP Rating	IP 20
Beam Angle	38°/24°*/60°*
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS Lighting - Global Intelligent Sustainability
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	10W	15W	20W
Outer (in MM)	ø60	ø78	ø84
Cut out (in MM)	ø59	ø70	ø80
Height (in MM)	75	90	105



DOTS-104-3W RECESSED DOWNLIGHTS

Product Features

Wattage	3W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Beam Angle	10°/ 15°/ 24°
Lamp	Bridgelux / Cree
Driver	PHILIPS EAGLERISE
Color Temp	3000K/4000K/6500K
Lumen Efficacy	

Dimensions

Wattages	03W
Outer (in MM)	ø32
Cut out (in MM)	ø28
Height (in MM)	30



Standard Driver



Automation Options Available





DOTS-301-5W RECESSED DOWNLIGHTS

Product Features

Wattage	5W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/ 15°/ 24°
Lamp	Bridgelux / Cree
Driver	PHILIPS EAGLERISE
Color Temp	3000K/4000K/6500K
Lumen Efficacy	

Elegant Functional Lighting

Dimensions

Wattages	05W
Outer (in MM)	Ø51
Cut out (in MM)	Ø42
Height (in MM)	45



Standard Driver



Automation Options Available





DOTS-204-32-5W RECESSED DOWNLIGHTS

Product Features

Wattage	5W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Beam Angle	10°/ 15°/ 24°
Lamp	Bridgelux / Cree
Driver	PHILIPS EAGLERISE
Color Temp	3000K/4000K/6500K
Lumen Efficacy	

Dimensions

Wattages	05W
Outer (in MM)	ø38
Cut out (in MM)	ø32
Height (in MM)	58




Standard Driver



Automation Options Available





DOTS-470-47-8W RECESSED DOWNLIGHTS

Product Features

Wattage	8W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/ 15°/ 24°
Lamp	Bridgelux / Cree
Driver	PHILIPS
Color Temp	3000K/4000K/6500K
Lumen Efficacy	

Dimensions

Wattages	08W
Outer (in MM)	Ø54
Cut out (in MM)	Ø47
Height (in MM)	50



Standard Driver



Automation Options Available





RECESSED LASER SPOT LIGHTS

Product Features

Wattage	10W/15W
Product Material	Aluminium Die Casting
Product Shape	Square
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°
Lamp	Bridgelux / Cree
Driver	
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	10W – MINI 3	15W – MINI 6
Outer (in MM)	Ø78 x 28	Ø120 x 28
Cut out (in MM)	Ø72 x 22	Ø114 x 22
Height (in MM)	38	38



GLOT –TRIM-RECESSED DOWNLIGHTS

Product Features

Wattage	8W/12W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°
Lamp	Bridgelux / Cree
Driver	  
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	08W	12W
Outer (in MM)	Ø40	Ø55
Cut out (in MM)	Ø33	Ø47
Height (in MM)	86	100



Standard Driver



Automation Options Available





GLOT – TILT-RECESSED DOWNLIGHTS

Product Features

Wattage	8W/12W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°
Lamp	Bridgelux / Cree
Driver	  
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	08W	12W
Outer (in MM)	Ø50	Ø66
Cut out (in MM)	Ø45	Ø60
Height (in MM)	87	99



DEEP RECESSED DOWNLIGHTS

Product Features

Wattage	8W/12W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°
Lamp	Bridgelux / Cree
Driver	  
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	08W	12W
Outer (in MM)	Ø45	Ø58
Cut out (in MM)	Ø38	Ø52
Height (in MM)	92	100



Standard Driver



Automation Options Available





HOLO-HOLE RECESSED DOWNLIGHTS

Product Features

Wattage	8W/12W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°
Lamp	Bridgelux / Cree
Driver	  
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	08W	12W
Outer (in MM)	Ø48	Ø50
Cut out (in MM)	Ø36	Ø40
Height (in MM)	86	86



Standard Driver



Automation Options Available





TUBO-DEEP-RECESSED DOWNLIGHTS

Product Features

Wattage	8W/12W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/24°*/ 60°*
Lamp	Bridgelux / Cree
Driver	FULHAM Lighting...Global. Intelligent. Sustainable. OSRAM PHILIPS
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Elegant Functional Lighting

Dimensions

Wattages	08W	12W
Outer (in MM)	Ø42	Ø52
Cut out (in MM)	Ø33	Ø44
Height (in MM)	95	77





LUKA - TILT- RECESSED DOWNLIGHTS

Product Features

Wattage	8W/12W/24W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/24°*/ 60°*
Lamp	Bridgelux / Cree
Driver	  
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Elegant Functional Lighting

Dimensions

Wattages	08W	12W	24W
Outer (in MM)	ø81	ø81	ø103
Cut out (in MM)	ø72	ø72	ø89
Height (in MM)	68	80	125






KLAW-TRIM-RECESSED DOWNLIGHTS

Product Features

Wattage	10W/15W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
Reflector Color	White/Black/Black Glassy/Aluminium Silver
IP Rating	IP 20
Beam Angle	38°
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	10W	15W
Outer (in MM)	ø56	ø72
Cut out (in MM)	ø50	ø65
Height (in MM)	100	100



KLAW-NO TRIM -RECESSED DOWNLIGHTS

Product Features

Wattage	10W/15W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
Reflector Color	White/Black/Black Glassy/Aluminium Silver
IP Rating	IP 20
Beam Angle	38°
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	10W	15W
Outer (in MM)	ø53	ø68
Cut out (in MM)	ø53	ø68
Height (in MM)	100	110



IGUZ RECESSED DOWNLIGHTS

Product Features

Wattage	7W/15W/24W/35W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Reflector Color	Chrome/Rose Gold/Black/White/Gun Metal/Metallic Silver
Beam Angle	38°
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	07W	15W	24W	35W
Outer (in MM)	Ø65	Ø87	Ø107	Ø126
Cut out (in MM)	Ø55	Ø75	Ø95	Ø115
Height (in MM)	55	69	86	93





RECESSED – TILT- DOWNLIGHTS

Product Features

Wattage	7W/15W/24W/35W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Reflector Color	Chrome/Rose Gold/Black/White/Gun Metal/Metallic Silver
Beam Angle	38°
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	07W	15W	24W
Outer (in MM)	Ø85	Ø106	Ø126
Cut out (in MM)	Ø78	Ø96	Ø116
Height (in MM)	56	70	86



Automation Options Available






LUMO-TRIM -RECESSED DOWNLIGHTS

Product Features

Wattage	8W/12W/18W/24W/33W/40W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/24°*/60°*
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	08W	12W	18W	24W	33W	40W
Outer (in MM)	Ø55	Ø71	Ø94	Ø116	Ø127	Ø145
Cut out (in MM)	Ø48	Ø60	Ø82	Ø106	Ø117	Ø135
Height (in MM)	43	58	72	86	90	100

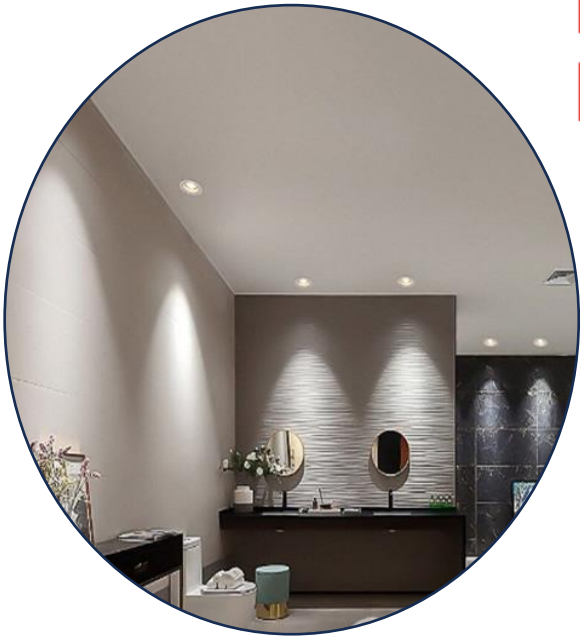

LUMO - DEEP TILT RECESSED DOWNLIGHTS

Product Features

Wattage	12W/18W/24W/33W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/24°*/60°*
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS Lighting... Global. Intelligent. Sustainable.
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Elegant Functional Lighting

Dimensions

Wattages	12W	18W	24W	33W
Outer (in MM)	Ø88	Ø107	Ø123	Ø150
Cut out (in MM)	Ø79	Ø98	Ø112	Ø140
Height (in MM)	80	86	93	97





LUMO-TILT- RECESSED DOWNLIGHTS

Product Features

Wattage	12W/18W/24W/33W/40W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/24°*/60°*
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	12W	18W	24W	33W	40W
Outer (in MM)	ø88	ø107	ø123	ø131	ø150
Cut out (in MM)	ø78	ø98	ø112	ø120	ø140
Height (in MM)	60	65	75	78	90



Automation Options Available





LUMO DEEP - RECESSED DOWNLIGHTS

Product Features

Wattage	8W/12W/18W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/24°*/60°*
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS Lighting... Global. Intelligent. Sustainable.
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Elegant Functional Lighting

Dimensions

Wattages	08W	12W	18W
Outer (in MM)	Ø63	Ø89	Ø108
Cut out (in MM)	Ø54	Ø76	Ø98
Height (in MM)	60	88	100



Standard Driver



Automation Options Available





MODULO-SQ-UNO-TILT-GIMBLE LIGHTS

Product Features

Wattage	12W/20W
Product Material	Aluminium Die Casting
Product Shape	Square
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/ 24°*/ 60°*
Lamp	Bridgelux / Cree
Driver	  
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Elegant Functional Lighting

Dimensions

Wattages	12W	20W
Outer (in MM)	Ø90	Ø90
Cut out (in MM)	Ø76	Ø76
Height (in MM)	90	105



Standard Driver



Automation Options Available





MODULO-SQ-DUO-TILT-RECESSED GIMBLE LIGHTS

Product Features

Wattage	2 x 12W/ 2 x 20W
Product Material	Aluminium Die Casting
Product Shape	Square
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/ 24°*/ 60°*
Lamp	Bridgelux / Cree
Driver	  
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Elegant Functional Lighting

Dimensions

Wattages	24W	40W
Outer (in MM)	ø90 x 180	ø90 x 180
Cut out (in MM)	ø76 x 165	ø76 x 165
Height (in MM)	90	105





MODULO-RD-UNO-TILT-GIMBLE LIGHTS

Product Features

Wattage	12W/18W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/ 24°*/ 60°*
Lamp	Bridgelux / Cree
Driver	  
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Elegant Functional Lighting

Dimensions

Wattages	12W	18W
Outer (in MM)	ø87	ø87
Cut out (in MM)	ø75	ø75
Height (in MM)	65	85



MODULO-RD-UNO-DEEP –TILT GIMBLE LIGHTS

Product Features

Wattage	12W/18W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/ 24°*/ 60°*
Lamp	Bridgelux / Cree
Driver	  
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	12W	18W
Outer (in MM)	Ø90	Ø95
Cut out (in MM)	Ø75	Ø85
Height (in MM)	75	95



MODULO-SQ-UNO-DEEP-GIMBLE LIGHTS

Product Features

Wattage	12W/18W
Product Material	Aluminium Die Casting
Product Shape	Square
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/ 24°*/ 60°*
Lamp	Bridgelux / Cree
Driver	  
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Elegant Functional Lighting

Dimensions

Wattages	12W	18W
Outer (in MM)	Ø85	Ø85
Cut out (in MM)	Ø81	Ø81
Height (in MM)	75	97





MODULO-SQ-DUO-DEEP-RECESSED GIMBLE LIGHTS

Product Features

Wattage	2 x 12W/ 2 x 18W
Product Material	Aluminium Die Casting
Product Shape	Square
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/ 24°*/ 60°*
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	2 x 12W	2 x 18W
Outer (in MM)	Ø105 x 205	Ø105 x 205
Cut out (in MM)	Ø85 x 179	Ø85 x 179
Height (in MM)	77	97



MODULO-RD-DUO-DEEP- GIMBLE LIGHTS

Product Features

Wattage	2 x 12W/ 2 x 18W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/ 24°*/ 60°*
Lamp	Bridgelux / Cree
Driver	  
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	2 x 12W	2 x 18W
Outer (in MM)	Ø95 x 192	Ø95 x 192
Cut out (in MM)	Ø85 x 182	Ø85 x 182
Height (in MM)	73	93



KONO - RECESSED DOWNLIGHTS

Product Features

Wattage	12W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/ 24°*/ 60°*
Lamp	Bridgelux / Cree
Driver	FULHAM Lighting...Global. Intelligent. Sustainable. OSRAM PHILIPS
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	12W
Outer (in MM)	ø84
Cut out (in MM)	ø73
Height (in MM)	63



Standard Driver




Automation Options Available







GLAZE UNO – 65 -12W



GLAZE UNO – 72 -12W



GLAZE UNO WALL WASHERS

Product Features

Wattage	12W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/24°*/ 60°*
Lamp	Bridgelux / Cree
Driver	  
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	GLAZE UNO – 65- 12W	GLAZE UNO -72-12W
Outer (in MM)	Ø58	Ø62
Cut out (in MM)	Ø65	Ø72
Height (in MM)	70	65



BRILLIO TILTABLE DOWNLIGHTS

Product Features

Wattage	6W/9W/12W/15W/18W/24W/40W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	Black / White
IP Rating	IP 20
Beam Angle	38°/ 24°*/ 60°*
Lamp	Bridgelux / Cree
Driver	
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	6W	9W-12W	15W	18W – 21W	24W – 30W	40W – 50W
Outer (in MM)	Ø102	Ø102	Ø125	Ø125	Ø148	Ø171
Cut out (in MM)	Ø86	Ø86	Ø110	Ø110	Ø132	Ø154
Height (in MM)	58	72	70	80	83	82




Luce Recessed Downlights

Product Features

Wattage	6W/12W/18W/24W
Product Material	Aluminium Die Casting
Product Shape	Round / Square
Body Color	Black / White
IP Rating	IP 20
Beam Angle	120°
Lamp	Bridgelux / Cree
Driver	
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	06W RD	06W SQ	12W RD	12W SQ	18W RD	18W SQ	24W RD	24W SQ
Outer (in MM)	Ø 120	120x120	Ø 145	145x145	Ø 170	170x170	Ø 195	195x195
Cut out (in MM)	Ø 100	100x100	Ø 125	125x125	Ø 150	150x150	Ø 175	175x175
Height (in MM)	35	35	35	35	35	35	35	35

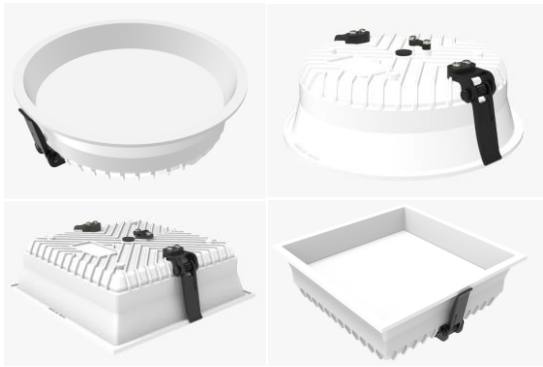

Lucido Recessed Downlights

Product Features

Wattage	8W/12W/18W/24W
Product Material	Aluminium Die Casting
Product Shape	Round / Square
Body Color	Black / White
IP Rating	IP 20
Beam Angle	120°
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	08W RD	08W SQ	12W RD	12W SQ	18W RD	18W SQ	24W RD	24W SQ
Outer (in MM)	Ø 122	122x122	Ø 148	148x148	Ø 173	173x173	Ø 173	173x173
Cut out (in MM)	Ø 110	110x110	Ø 136	136x136	Ø 160	160x160	Ø 160	160x160
Height (in MM)	48	48	48	48	48	48	48	48



Luce - Surface Downlights

Product Features

Wattage	6W/12W/18W/24W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	Black / White
IP Rating	IP 20
Beam Angle	120°
Lamp	Bridgelux / Cree
Driver	
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	06W	12W	18W	24W
Outer (in MM)	Ø104	Ø132.5	Ø158	Ø184
Height (in MM)	66.5	66.5	66.5	66.5



Kira Track Lights

Product Features

Wattage	10W/20W/30W/40W
Product Material	Aluminium Extrusions
Product Shape	Round
Body Color	Black / White
IP Rating	IP 20
Beam Angle	38°/24°*/60°*
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS Lighting - Global Intelligent Sustainability
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	10W	20W	30W	40W
Outer (in MM)	Ø50	Ø60	Ø70	Ø80
Height (in MM)	135	150	150	180



Automation Options Available





Uno - Track Lights

Product Features

Wattage	8W/12W/30W
Product Material	Aluminium Extrusions
Product Shape	Round
Body Color	Black / White
IP Rating	IP 20
Beam Angle	38°/24°*/60°*
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	8W	12W	30W
Outer (in MM)	ø46	ø46	ø82
Height (in MM)	115	170	166





Kira Surface Cylindrical Lights

Product Features

Wattage	12W/24W
Product Material	Aluminium Extrusions
Product Shape	Round
Body Color	Black / White
IP Rating	IP 20
Beam Angle	38°/24°/60°
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	12W	24W
Outer (in MM)	ø60	ø70
Height (in MM)	140	160



SURFACE CYLINDRICAL LIGHTS

Product Features

Wattage	15W/24W
Product Material	Aluminium Extrusions
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/24°*/ 60°*
Lamp	Bridgelux / Cree
Driver	  
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	15W	24W
Outer (in MM)	Ø85	Ø100
Height (in MM)	Ø105	Ø120



Standard Driver



Automation Options Available





STEAM- RECESSED DOWNLIGHTS

Product Features

Wattage	12W/25W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 65
Beam Angle	38°/24°*/ 60°*
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Elegant Functional Lighting

Dimensions

Wattages	12W	25W
Outer (in MM)	ø92	ø123
Cut out (in MM)	ø80	ø110
Height (in MM)	80	96



Standard Driver



Automation Options Available

