

LIGHT WORKS


Product Portfolio



2024 Summer Collection

RETAIL LIGHTING PORTFOLIO



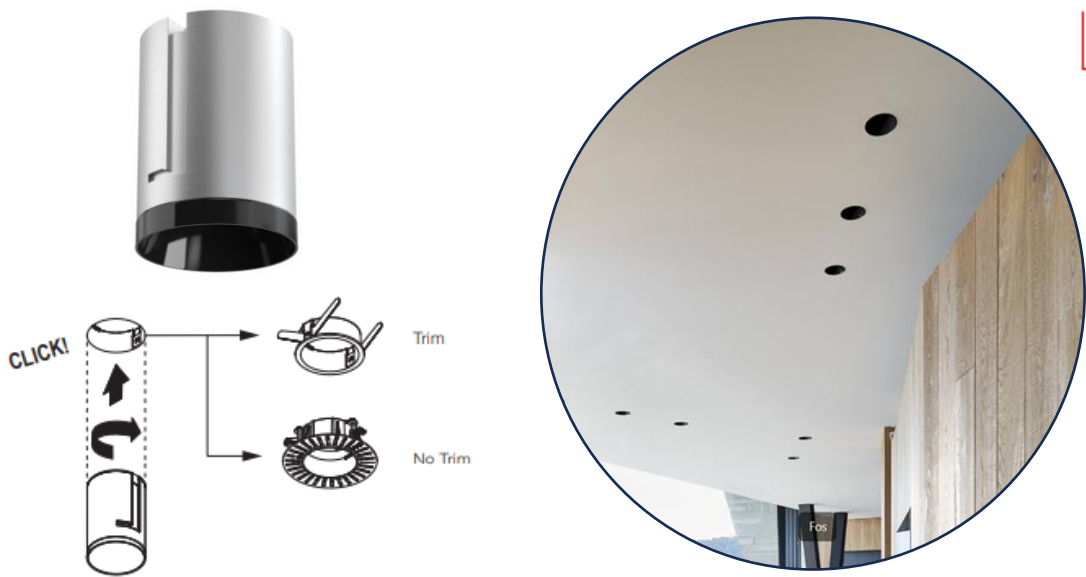


Recessed Lights

Product Features

Wattage	10W/15W/20W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	Black / White
IP Rating	IP 20
Beam Angle	38°/24°*/60°*
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	10W	15W	20W
Outer (in MM)	ø50	ø60	ø80
Cut out (in MM)	ø59	ø70	ø80
Height (in MM)	75	90	105

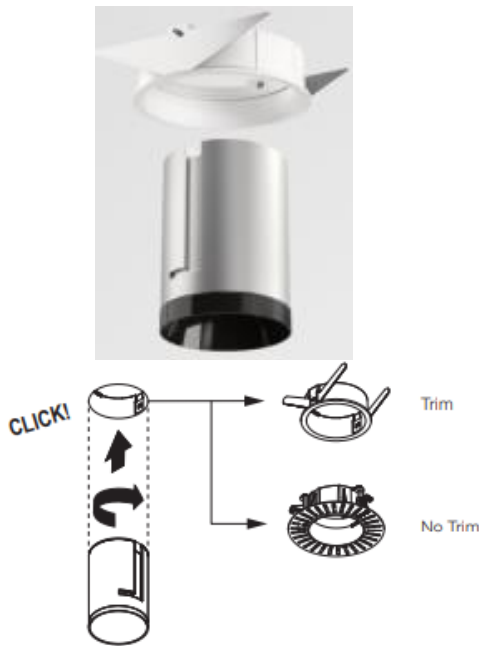

Fos-Trim-Recessed Lights

Product Features

Wattage	10W/15W/20W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	Black / White
IP Rating	IP 20
Beam Angle	38°/24°*/60°*
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS Lighting - Global Intelligent Sustainability
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	10W	15W	20W
Outer (in MM)	ø60	ø78	ø84
Cut out (in MM)	ø59	ø70	ø80
Height (in MM)	75	90	105



LUKA - TILT- RECESSED DOWNLIGHTS

Product Features

Wattage	8W/12W/24W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/24°*/ 60°*
Lamp	Bridgelux / Cree
Driver	  
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Elegant Functional Lighting

Dimensions

Wattages	08W	12W	24W
Outer (in MM)	ø81	ø81	ø103
Cut out (in MM)	ø72	ø72	ø89
Height (in MM)	68	80	125





LUMO - DEEP TILT RECESSED DOWNLIGHTS

Product Features

Wattage	12W/18W/24W/33W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/24°*/60°*
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS Lighting... Global. Intelligent. Sustainable.
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Elegant Functional Lighting

Dimensions

Wattages	12W	18W	24W	33W
Outer (in MM)	Ø88	Ø107	Ø123	Ø150
Cut out (in MM)	Ø79	Ø98	Ø112	Ø140
Height (in MM)	80	86	93	97





LUMO DEEP - RECESSED DOWNLIGHTS

Product Features

Wattage	8W/12W/18W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/24°*/60°*
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS Lighting... Global. Intelligent. Sustainable.
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	08W	12W	18W
Outer (in MM)	Ø63	Ø89	Ø108
Cut out (in MM)	Ø54	Ø76	Ø98
Height (in MM)	60	88	100



Standard Driver



Automation Options Available





LUMO-TRIM -RECESSED DOWNLIGHTS

Product Features

Wattage	8W/12W/18W/24W/33W/40W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/24°*/60°*
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS Lighting... Global. Intelligent. Sustainable.
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	08W	12W	18W	24W	33W	40W
Outer (in MM)	Ø55	Ø71	Ø94	Ø116	Ø127	Ø145
Cut out (in MM)	Ø48	Ø60	Ø82	Ø106	Ø117	Ø135
Height (in MM)	43	58	72	86	90	100



LUMO-TILT- RECESSED DOWNLIGHTS

Product Features

Wattage	12W/18W/24W/33W/40W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/24°*/60°*
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS Lighting... Global. Intelligent. Sustainable.
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Elegant Functional Lighting

Dimensions

Wattages	12W	18W	24W	33W	40W
Outer (in MM)	ø88	ø107	ø123	ø131	ø150
Cut out (in MM)	ø78	ø98	ø112	ø120	ø140
Height (in MM)	60	65	75	78	90



Automation Options Available






Luce Recessed Downlights

Product Features

Wattage	6W/12W/18W/24W
Product Material	Aluminium Die Casting
Product Shape	Round / Square
Body Color	Black / White
IP Rating	IP 20
Beam Angle	120°
Lamp	Bridgelux / Cree
Driver	
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	06W RD	06W SQ	12W RD	12W SQ	18W RD	18W SQ	24W RD	24W SQ
Outer (in MM)	Ø 120	120x120	Ø 145	145x145	Ø 170	170x170	Ø 195	195x195
Cut out (in MM)	Ø 100	100x100	Ø 125	125x125	Ø 150	150x150	Ø 175	175x175
Height (in MM)	35	35	35	35	35	35	35	35

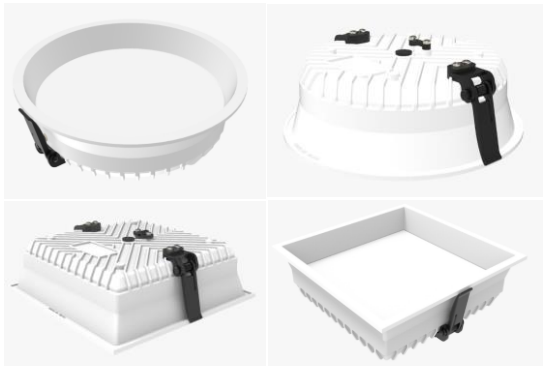

Lucido Recessed Downlights

Product Features

Wattage	8W/12W/18W/24W
Product Material	Aluminium Die Casting
Product Shape	Round / Square
Body Color	Black / White
IP Rating	IP 20
Beam Angle	120°
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	08W RD	08W SQ	12W RD	12W SQ	18W RD	18W SQ	24W RD	24W SQ
Outer (in MM)	Ø 122	122x122	Ø 148	148x148	Ø 173	173x173	Ø 173	173x173
Cut out (in MM)	Ø 110	110x110	Ø 136	136x136	Ø 160	160x160	Ø 160	160x160
Height (in MM)	48	48	48	48	48	48	48	48



Automation Options Available





Luce - Surface Downlights

Product Features

Wattage	6W/12W/18W/24W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	Black / White
IP Rating	IP 20
Beam Angle	120°
Lamp	Bridgelux / Cree
Driver	
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	06W	12W	18W	24W
Outer (in MM)	Ø104	Ø132.5	Ø158	Ø184
Height (in MM)	66.5	66.5	66.5	66.5



Automation Options Available





BRILLIO TILTABLE DOWNLIGHTS

Product Features

Wattage	6W/9W/12W/15W/18W/24W/40W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	Black / White
IP Rating	IP 20
Beam Angle	38°/ 24°*/ 60°*
Lamp	Bridgelux / Cree
Driver	
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	6W	9W-12W	15W	18W – 21W	24W – 30W	40W – 50W
Outer (in MM)	Ø102	Ø102	Ø125	Ø125	Ø148	Ø171
Cut out (in MM)	Ø86	Ø86	Ø110	Ø110	Ø132	Ø154
Height (in MM)	58	72	70	80	83	82



RECESSED – TILT- DOWNLIGHTS

Product Features

Wattage	7W/15W/24W/35W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Reflector Color	Chrome/Rose Gold/Black/White/Gun Metal/Metallic Silver
Beam Angle	38°
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	07W	15W	24W
Outer (in MM)	Ø85	Ø106	Ø126
Cut out (in MM)	Ø78	Ø96	Ø116
Height (in MM)	56	70	86



Automation Options Available





IGUZ RECESSED DOWNLIGHTS

Product Features

Wattage	7W/15W/24W/35W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Reflector Color	Chrome/Rose Gold/Black/White/Gun Metal/Metallic Silver
Beam Angle	38°
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	07W	15W	24W	35W
Outer (in MM)	ø65	ø87	ø107	ø126
Cut out (in MM)	ø55	ø75	ø95	ø115
Height (in MM)	55	69	86	93





IGUZ GIMBLE LIGHTS

Product Features

Wattage	1 x 20W/ 2 x 20W/ 1 X 30W/ 2 X 30W
Product Material	Aluminium Die Casting
Product Shape	Square
Body Color	Black / White
Reflector Color	Chrome/ Rose Gold/ Black/White/Metallic Silver
IP Rating	IP 20
Beam Angle	38°
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS Lighting... Global. Intelligent. Sustainable.
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	1 x 20W	2 x 20W	1 x 30W	2 x 30W
Outer (in MM)	Ø145	Ø145 x 290	Ø165	Ø165 x 330
Cut out (in MM)	Ø132	Ø272 x 132	Ø153	Ø312 x 153
Height (in MM)	95	95	106	106



Standard Driver



Automation Options Available





BRILLIO GIMBLE LIGHTS

Product Features

Wattage	1 x 24W/ 2 x 24W
Product Material	Aluminium Die Casting
Product Shape	Square
Body Color	Black / White
IP Rating	IP 20
Beam Angle	38°/ 24°*/ 60°*
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	1X24W	2X24W
Outer (in MM)	Ø180	Ø180
Cut out (in MM)	Ø155	Ø156 x 309
Height (in MM)	100	100





MODULO-RD-DUO-DEEP- GIMBLE LIGHTS

Product Features

Wattage	2 x 12W/ 2 x 18W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/ 24°*/ 60°*
Lamp	Bridgelux / Cree
Driver	  
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	2 x 12W	2 x 18W
Outer (in MM)	Ø95 x 192	Ø95 x 192
Cut out (in MM)	Ø85 x 182	Ø85 x 182
Height (in MM)	73	93



MODULO-RD-UNO-DEEP –TILT GIMBLE LIGHTS

Product Features

Wattage	12W/18W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/ 24°*/ 60°*
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	12W	18W
Outer (in MM)	Ø90	Ø95
Cut out (in MM)	Ø75	Ø85
Height (in MM)	75	95



MODULO-RD-UNO-TILT-GIMBLE LIGHTS

Product Features

Wattage	12W/18W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/ 24°*/ 60°*
Lamp	Bridgelux / Cree
Driver	  
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Elegant Functional Lighting

Dimensions

Wattages	12W	18W
Outer (in MM)	ø87	ø87
Cut out (in MM)	ø75	ø75
Height (in MM)	65	85



MODULO-SQ-DUO-DEEP-RECESSED GIMBLE LIGHTS

Product Features

Wattage	2 x 12W/ 2 x 18W
Product Material	Aluminium Die Casting
Product Shape	Square
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/ 24°*/ 60°*
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	2 x 12W	2 x 18W
Outer (in MM)	Ø105 x 205	Ø105 x 205
Cut out (in MM)	Ø85 x 179	Ø85 x 179
Height (in MM)	77	97



MODULO-SQ-DUO-TILT-RECESSED GIMBLE LIGHTS

Product Features

Wattage	2 x 12W/ 2 x 20W
Product Material	Aluminium Die Casting
Product Shape	Square
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/ 24°*/ 60°*
Lamp	Bridgelux / Cree
Driver	  
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Elegant Functional Lighting

Dimensions

Wattages	24W	40W
Outer (in MM)	ø90 x 180	ø90 x 180
Cut out (in MM)	ø76 x 165	ø76 x 165
Height (in MM)	90	105





MODULO-SQ-UNO-DEEP-GIMBLE LIGHTS

Product Features

Wattage	12W/18W
Product Material	Aluminium Die Casting
Product Shape	Square
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/ 24°*/ 60°*
Lamp	Bridgelux / Cree
Driver	  
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	12W	18W
Outer (in MM)	Ø85	Ø85
Cut out (in MM)	Ø81	Ø81
Height (in MM)	75	97



MODULO-SQ-UNO-TILT-GIMBLE LIGHTS

Product Features

Wattage	12W/20W
Product Material	Aluminium Die Casting
Product Shape	Square
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/ 24°*/ 60°*
Lamp	Bridgelux / Cree
Driver	  
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Elegant Functional Lighting

Dimensions

Wattages	12W	20W
Outer (in MM)	ø90	ø90
Cut out (in MM)	ø76	ø76
Height (in MM)	90	105



Standard Driver



Automation Options Available





GLAZE TRIO – 8W



GLAZE HEXO – 18W



GLAZE RECESSED WALL WASHERS

Product Features


Wattage	8W/18W
Product Material	Aluminium Die Casting
Product Shape	
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/24°*/ 60°*
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	GLAZE TRIO – 8W	GLAZE HEXO-18W
Outer (in MM)	Ø118 x 50	Ø225 x 50
Cut out (in MM)	Ø108 x 40	Ø215 x 40



GLAZE DUO-12W

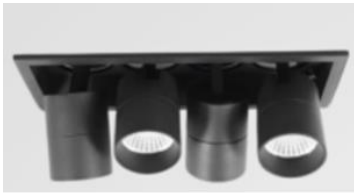

GLAZE QUATRO – 20W



GLAZE WALL WASHERS

Product Features

Wattage	12W/20W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/24°*/ 60°*
Lamp	Bridgelux / Cree
Driver	  
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	GLAZE DUO-12W	GLAZE QUATRO – 20W
Outer (in MM)	Ø108 x 70	Ø190 x 70
Cut out (in MM)	Ø98 x 62	Ø182 x 40



GLAZE UNO – 65 -12W



GLAZE UNO – 72 -12W



GLAZE UNO WALL WASHERS

Product Features

Wattage	12W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/24°*/ 60°*
Lamp	Bridgelux / Cree
Driver	  
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	GLAZE UNO – 65- 12W	GLAZE UNO -72-12W
Outer (in MM)	Ø58	Ø62
Cut out (in MM)	Ø65	Ø72
Height (in MM)	70	65



RECESSED LASER SPOT LIGHTS

Product Features

Wattage	10W/15W
Product Material	Aluminium Die Casting
Product Shape	Square
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°
Lamp	Bridgelux / Cree
Driver	  
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Elegant Functional Lighting

Dimensions

Wattages	10W – MINI 3	15W – MINI 6
Outer (in MM)	Ø78 x 28	Ø120 x 28
Cut out (in MM)	Ø72 x 22	Ø114 x 22
Height (in MM)	38	38



Standard Driver



Automation Options Available





Kira Track Lights

Product Features

Wattage	10W/20W/30W/40W
Product Material	Aluminium Extrusions
Product Shape	Round
Body Color	Black / White
IP Rating	IP 20
Beam Angle	38°/24°*/60°*
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS Lighting - Global Intelligent Sustainability
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	10W	20W	30W	40W
Outer (in MM)	Ø50	Ø60	Ø70	Ø80
Height (in MM)	135	150	150	180





Uno - Track Lights

Product Features

Wattage	8W/12W/30W
Product Material	Aluminium Extrusions
Product Shape	Round
Body Color	Black / White
IP Rating	IP 20
Beam Angle	38°/24°*/60°*
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS Lighting - Global Intelligent Sustainability
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	8W	12W	30W
Outer (in MM)	Ø46	Ø46	Ø82
Height (in MM)	115	170	166



Automation Options Available





Eldi Track Lights

Product Features

Wattage	20W/30W/40W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	Black / White
IP Rating	IP 20
Beam Angle	38°/24°*/60°*
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS
Color Temp	3000K/4000K/6500K
Lumen Efficacy	

Dimensions

Wattages	20W	30W	40W
Outer (in MM)	Ø	Ø	Ø103
Height (in MM)			167





Kira Surface Cylindrical Lights

Product Features

Wattage	12W/24W
Product Material	Aluminium Extrusions
Product Shape	Round
Body Color	Black / White
IP Rating	IP 20
Beam Angle	38°/24°/60°
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	12W	24W
Outer (in MM)	ø60	ø70
Height (in MM)	140	160



SURFACE CYLINDRICAL LIGHTS

Product Features

Wattage	15W/24W
Product Material	Aluminium Extrusions
Product Shape	Round
Body Color	White/Black
IP Rating	IP 20
Beam Angle	38°/24°*/ 60°*
Lamp	Bridgelux / Cree
Driver	  
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	15W	24W
Outer (in MM)	Ø85	Ø100
Height (in MM)	Ø105	Ø120



Standard Driver



Automation Options Available







ZOOM LIGHTS

Product Features

Wattage	6W/9W/12W/15W/18W/20W/24W
Product Material	Aluminium Die Casting
Product Shape	Round
Body Color	White
IP Rating	IP 20
Beam Angle	38° / 24°* / 60°*
Lamp	Bridgelux / Cree
Driver	FULHAM OSRAM PHILIPS Lighting - Global Intelligent Sustainability
Color Temp	3000K/4000K/6500K/ CCT Tunable
Lumen Efficacy	

Dimensions

Wattages	06 W	09W	12W	15W	18W	20W	24W	35W
Outer (in MM)	Ø96.25	Ø96.25	Ø96.25	Ø132.5	Ø132.5	Ø132.5	Ø148	Ø148
Cut out (in MM)	Ø92	Ø92	Ø92	Ø124	Ø124	Ø124	Ø140	Ø140
Height (in MM)	72	72	72	104	104	104	110	110

